


CODE PF :

STANDARD PF :

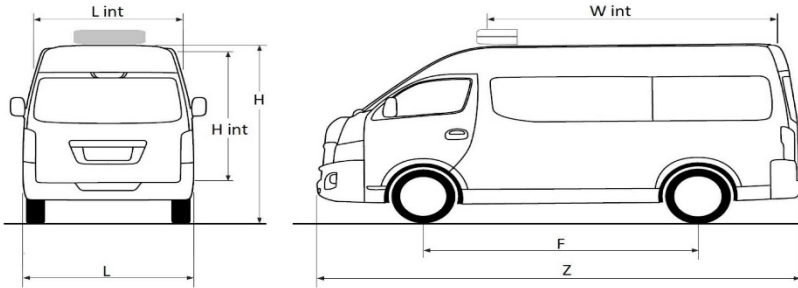

Dimensions in mm		L :	2050
W int useful on baseboard:	2990	Z :	5413
L int useful on baseboard:	1740	Hc :	
Int height:	1802	F :	3450
Max height:	2474	X:	

Volume m3 :

9,4

Country

AE

Language

EN

CAB

ENGINE,

CHASSIS

Near side unglazed sliding side door - Twin unglazed rear doors - Full steel bulkhead with sliding window - Eight tie-down hooks in the load area (ten on L3 & L4) - Load area interior light (two on H2 & H3) - Electronic Stability Control, EBF (Electronic Brake Force Distribution) and ABS - Driver and Front Passenger's airbag - Remote central locking with deadlocks; separate locking for cab - Drivers seat with lumbar adjustment, height adjustment + armrest. Includes folding writing table on passenger seat - Trio cab passenger seat - Reach adjustable steering column - Front electric windows - Full size steel spare wheel - 'Magnet' Cloth upholstery - Cup Holders - FM, DAB Digital Radio -

Diesel 2.2 BlueHDi 140bhp
High pressure turbo-charged direct injection
Manual Gear Box - 6 speeds
Fuel consumption average city 7L / 100km
Tank Capacity 90L

Front: Independent MacPherson type struts with anti-roll bar
Rear: Independent trailing arm wishbone suspension.

BODYWORK

- Reinforced insulation - Thickness 100 mm
- 1 hinged rear door + 1 additional rear door thickness : 100 mm
- 1 sliding side door on the right front + 1 Additional hinged door behind the sliding door thickness: 100 mm
- Reinforced floor (thickness : 100 mm) on top of which will be the floor finish with aluminium chequered with 1 drain pipe and wheel housings

REFRIGERATED UNIT

- CARRIER Citymax 400/+20° CELSIUS / -18° Celsius or equivalent
- On road functioning only
- On road cooling power (at 2400 rpm) : at 0°C = 3430 W / at -20°C = 2010 W / Airflow : 1690 m3/h



VEHICLES




DISPLAY UNITS



COLDSTORES

CODE PF :

STANDARD PF :

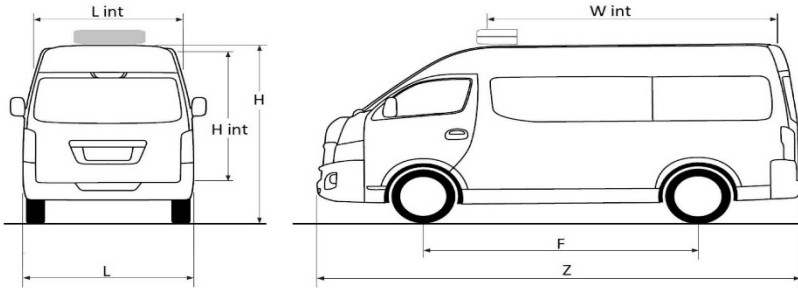

Dimensions in mm		L :	2050
W int useful on baseboard:	3940	Z :	6363
L int useful on baseboard:	1740	Hc :	
Int height:	2038	F :	4035
Max height:	2980	X:	

Volume m3 :

13,97

Country

AE

Language

EN

CAB

ENGINE,

CHASSIS

Near side unglazed sliding side door - Twin unglazed rear doors - Full steel bulkhead with sliding window - Eight tie-down hooks in the load area (ten on L3 & L4) - Load area interior light (two on H2 & H3) - Electronic Stability Control, EBF (Electronic Brake Force Distribution) and ABS - Driver and Front Passenger's airbag - Remote central locking with deadlocks; separate locking for cab - Drivers seat with lumbar adjustment, height adjustment + armrest. Includes folding writing table on passenger seat - Trio cab passenger seat - Reach adjustable steering column - Front electric windows - Full size steel spare wheel - 'Magnet' Cloth upholstery - Cup Holders - FM, DAB Digital Radio -

Diesel 2.2 BlueHDi 140bhp
High pressure turbo-charged direct injection
Manual Gear Box - 6 speeds
Fuel consumption average city 7L / 100km
Tank Capacity : 90L

Front: Independent MacPherson type struts with anti-roll bar
Rear: Independent trailing arm wishbone suspension.

BODYWORK

- Reinforced insulation - Thickness 100 mm
- 1 hinged rear door + 1 additional rear door thickness : 100 mm
- 1 sliding side door on the right front + 1 Additional hinged door behind the sliding door thickness: 100 mm
- Reinforced floor (thickness : 100 mm) on top of which will be the floor finish with aluminium chequered with 1 drain pipe and wheel housings

REFRIGERATED UNIT

- CARRIER Citymax 400/+20° CELSIUS / -18° Celsius or equivalent
- On road functioning only
- On road cooling power (at 2400 rpm) : at 0°C = 3430 W / at -20°C = 2010 W / Airflow : 1690 m3/h

