
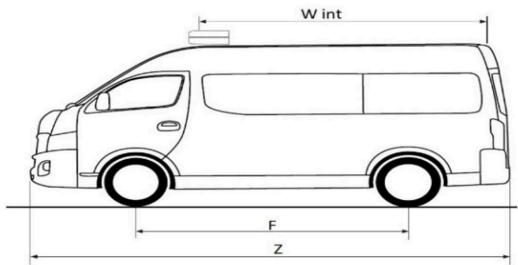


PEUGEOT PARTNER STANDARD (+20° to -20°)

CODE PF :

STANDARD PF :



Dimensions in mm		L :	1250
W int useful on baseboard:	1870	Z :	4403
L int useful on baseboard:	1100	Hc :	
Int height:	1100	F :	2795
Max height:	2069	X:	

Volume m3 :	2,26
-------------	------

Country	AE
Language	EN

CAB	ENGINE,	CHASSIS
ESC with Hill Start Assist, ABS braking including EBA and EBFD - Manual Parking Brake - Automatic activation of hazard lights on major deceleration - Remote central locking with deadlocks and separate locking for cab - Full steel bulkhead - Driver and passenger airbag - Electric front windows (One touch) - Electrically adjustable and heated door mirrors Seating - Driver's seat with rake and reach adjustment - Individual passenger seat with under seat storage Comfort & Convenience - Full size steel spare wheel - PEUGEOT i-Cockpit® with head-up display and compact steering wheel Lighting and Visibility - Daytime Running Lights Technology & Entertainment - 8" capacitive colour touchscreen offering Apple CarPlay™, Android Auto with steering mounted controls, 1 USB port Exterior Features - 15" Steel wheels (650kg L1 models) - Unglazed asymmetric rear doors, opening to 180 degrees -	Diesel 1.5 BlueHDi 100bhp High pressure turbo-charged direct injection Manual Gear Box - 6 speeds Fuel consumption average city 7.3L / 100km Tank Capacity 60L	Front: Independent MacPherson type struts with anti-roll bar Rear: Independent trailing arm wishbone suspension.

BODYWORK

- Reinforced insulation - Thickness 100 mm
- 1 hinged rear door + 1 additional rear door thickness : 100 mm
- 1 sliding side door on the right front + 1 Additional hinged door behind the sliding door thickness: 100 mm
- Reinforced floor (thickness : 100 mm) on top of which will be the floor finish with aluminium chequered with 1 drain pipe and wheel housings

REFRIGERATED UNIT

- | | |
|--|---|
| • CARRIER Citymax 350/+20°CELSIUS / -18° Celsius or equivalent | • On road functioning only
• On road cooling power (at 2400 rpm) : at 0°C = 3430 W / at -20°C = 2010 W / Airflow : 1690 m3/h |
|--|---|

