


PF CODE : NQR500.150 CF

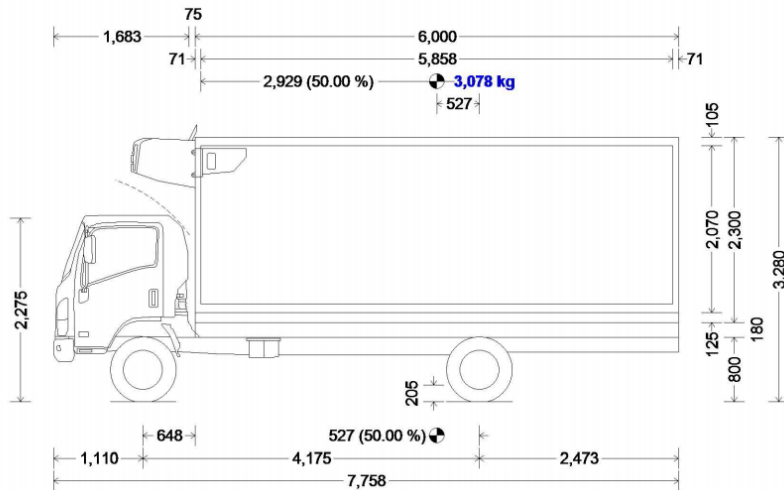

Dimensions in mm

W int useful on baseboard	2358
L int useful on baseboard	5858
Int height	2070
Max height	3280
L :	6000
Z :	7758
Hc :	800
F :	4175
X:	2473

GVW : 8,500 kg

Payload : 3,000 kg (+/- 5%)

Volume : 29 m3

CAB

- 3 seats
- Adjustable driver's seat
- 24V cigarette lighter
- Power steering
- Heater and demister
- Tilt
- Tilt torsion bar assistance

ENGINE

- EURO 2
- Turbocharged & Intercooled / 5.2L / Common Rail / 150 hp
- 4-cylinder
- Auto gearbox
- 2 x 70 Ah Batteries
- 50 A Alternator

CHASSIS

- Tyres : 225/70R19.5
- 100 L lockable fuel tank
- Anti fuel theft device
- Lockable battery cover
- Mechanical rear suspension
- Braking system with ABS
- ASR
- Rear slide away step
- Mudflaps
- Rear rubber bumper rollers
- LED rear tail and number plate lights

BODYWORK

- Reinforced insulation
- Additional 50 PU density
- Double rear door
- 2 interior LED lights with timer
- 2 Drain holes
- Rice grain aluminium floor
- Aluminium scuffs on sides and front
- Transparent plastic curtains
- Trolley bracket
- Escape hatch
- 2 Rows loadlock rails per side and 2 shoring bars
- Under slung door retainers
- Temperature box gauge

REFRIGERATED UNIT

- CARRIER / SUPRA 450
- On road functioning, diesel and mains supply / (380 V Triphased)
- On road cooling power (at 2400 tr/min) : at 0°C = 4365 W / at -20°C = 2515 W / Airflow : 1590 m3/h
- Evaporator guard
- Access ladder
- Catwalk
- Fridge door switch

IZUSU NQR 500 AMT - COOLING BOX

